



MyWatt

Product introduction

Smart Power Plug is a simple and exquisite product, based on cloud service through which users can turn home devices on&off and check power consumption from anywhere in the world.

Specifications

Model: SEM200

Input: 220-250V~, 16A / 50Hz

Output: 220-250V~, 16A / 50Hz

Network: Wi-Fi 802.11 b/g/n

Weight: 165g




Dimension: 66X116X75 mm

Operating Sys: Android: more than 800x480 resolution, Android 4.3+;

iOS: iOS8.0+

Web Browser: IE8+, Safari, Firefox, Chrome and other.



LED	Status	Description
 Power LED	Off	Power Off
	On	Power On
 Wi-Fi LED	On	Network Linked (device successfully connected)
	Flashing	<ul style="list-style-type: none"> ·Slow flashing (device is now connecting to your network or the Wi-Fi password is not correct) ·Quick flashing (device not connected to your network yet)
 System LED	Off	Unlinked
	On	Linked
Button	Function	
Power button	Power On/Off. Factory reset /keep pressing this button until the Wi-Fi LED is off, add the device will be back to factory default.	

Device Installation

Step 1: Download APP



Scan with your smartphone or search the app store for **MyWatt**.

Step 2: Plug into the power outlet



The power of Smart Plug will be on and wait till the Wi-Fi LED flashes quickly.

Step 3: Operate the APP




Sign up/ Log in



1. Tap Log in if you already have an account or any 3rd party account: e.g. Facebook, Twitter etc.
2. Tap sign up and create an account. Enter your valid e-mail address when signing up for a new account.
3. If you forgot your password, reset it with the e-mail that you had used while registering an account.

Reset your password




Forgot the password to your account? Reset it in these few simple steps:

1. Input the e-mail address that you have used when signing up.
2. Send verification code to your e-mail.
3. Input the verification code.
4. Set the new password.

Functionality

Homepage Management



☰ Tap to enter App Settings:

- Language settings
- Help and Feedback
- Price settings
- About



Tap to enter Account Settings:

- Change your profile Picture
- Change the name
- Check your account information
- Reset the password
- Log out




Control the plug and check the information about your device. Long press your Smart Plug to enter the device settings.



Tap to add new devices.

+ Add New Devices

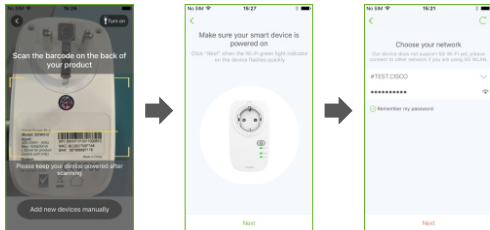

1. Make sure your smart phone has linked to the Wi-Fi network.
2. Tap Add New Device on Homepage, choose Scan the bar code on the back of device or Add new device manually. Tap on the flashlight icon on the upper right corner if the environment is not bright enough or the scanning has not been successful.
3. Enter the password of your router.


Factory default reset


Reset the device by pressing the physical button on your Smart Plug until the Wi-Fi light indicator turns off.


You can also reset your device by deleting the device from your device list in the home menu or in the device settings (long press the device listed on the home menu, enter Setting and reset to Factory Settings).

Real-time Power Consumption




 Tap to return to homepage

 Tap to enter setting:
Edit the product name/ Check the firmware version / Check the product information/ Switch on the reboot function

 Socket Reboot: When network disconnection is detected, the socket that the router is plugged into will restart your router automatically.

 Real-time watts reading, up to display 2400W.

History Power Consumption



1. Monitor history power consumption displayed by kWh or the price.


Energy Cost

2. Monitor history power consumption displayed by Hours, Days, Month.

3. Tap "newest" to check current power usage.


4. Check the past statistics even when the device is offline.

Timer



1. Slide to set the timer.
2. Set the timer by “quick buttons” in 30s/ 1min/ 5min/ 30min.
3. Cancel the timer after it started when you change your mind.

Schedule Setting



1. Set up to 12 schedules for one Smart Power Plug.
2. Schedules are stored in the device, even if the device is disconnected from the internet or is not controlled by the smart phone. The schedule will still be activated.

제품 소개

MyWatt 스마트 전원 플러그는 클라우드 서비스를 기반으로 전 세계 어디에서든 사용자가 가전제품을 켜고 끄거나 소비 전력을 확인할 수 있는 간단하면서도 정교한 제품입니다.

사양

모델: SEM200

입력: 220-250V~, 16A / 60Hz

출력: 220-250V~, 16A / 60Hz




네트워크: Wi-Fi 802.11 b/g/n

무게: 165g

크기: 66X116X75 mm

운영체제: 안드로이드: 800×480 해상도 이상, 안드로이드 4.3+;
아이폰 OS: iOS8.0+
웹 브라우저: IE8 +, 사파리, 파이어폭스, 크롬 및 기타.



LED	상태	동작
 전원 LED	Off	전원 꺼짐
	On	전원 켜짐
 Wi-Fi LED	On	네트워크 연동 (장치가 성공적으로 연결)
	깜빡임	<ul style="list-style-type: none"> · 느리게 깜박임 (장치가 현재 네트워크에 연결되었거나 와이파이 암호가 올바르지 않습니다) · 빠르게 깜박임 (장치가 네트워크에 연결되지 않았습니다)
 시스템 LED	Off	연결해제
	On	연결
버튼	기능	
전원 버튼	전원 켜짐/꺼짐 Wi-Fi LED가 꺼질 때까지 버튼을 계속 누르면, 장치는 공장 출하시 기본값으로 복원됩니다.	

1 단계: 앱 다운로드



스마트 폰으로 스캔하거나 MyWatt 홈을 위한 앱 스토어를 검색 할 수 있습니다.

2 단계: 전원 콘센트에 연결



스마트 플러그의 전원을 켜고 와이파이 LED가 빠르게 깜박일 때까지 기다립니다.

3 단계: 앱을 작동




회원 가입/ 로그인



1. MyWatt 계정 또는 써드파티가 이미있는 경우 로그인을 누릅니다.
예. 페이스북, 트위터 등
2. 가입버튼을 탭하고 계정을 만듭니다. 새 계정에 가입 할 때 사용자의 정확한 이메일 주소를 입력합니다.
3. 비밀번호를 잊어 버린 경우, 계정에 등록된 이메일로 비밀번호가 재설정 되어 보내집니다.


비밀번호를 재설정



계정의 암호를 잊으셨습니까? 아래의 몇 가지 간단한 단계로 재설정 됩니다:

1. 가입할 때 사용한 이메일 주소를 입력합니다.
2. 이메일로 인증 코드가 전송됩니다.
3. 인증 코드를 입력합니다.
4. 새 암호를 설정합니다.

홈페이지 관리



앱 설정을 입력 탭:

- 언어 설정
- 도움말 및 피드백
- 가격 설정
- 어바웃



계정 설정 입력 탭 :

- 프로필 사진 변경
- 이름 변경
- 귀하의 계정 정보를 확인
- 암호를 재설정
- 로그 아웃




플러그를 제어하고 장치에 대한 정보를 확인하십시오.
스마트 플러그를 길게 눌러 장치 설정을 입력합니다.



새로운 장치를 추가하려면 누르세요.

⊕ 새로운 장치 추가

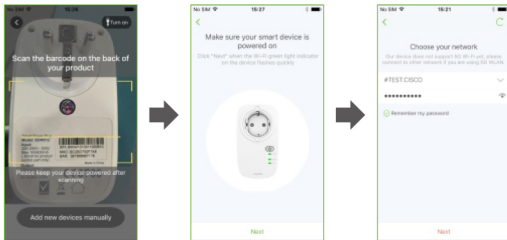


1. 스마트 폰이 Wi-Fi 네트워크에 연결됐는지 확인하십시오.
2. 홈페이지에 새 장치 추가를 누르신 다음, 장치의 뒷면에 있는 바코드를 스캔하거나 수동으로 새 장치 추가를 선택합니다. 충분히 밝지 않거나 스캔이 성공되지 않는 환경이라면 상단 오른쪽 모서리에 있는 플래시라이트 아이콘을 누릅니다.
3. 라우터의 암호를 입력합니다.

공장 초기화


Wi-Fi 표시등이 꺼질 때까지 스마트 플러그에 물리 버튼을 눌러 장치를 재설정합니다.


또한 홈 메뉴의 장치 목록 또는 장치 설정에서 장치를 삭제하여 장치를 재설정 할 수 있습니다 (홈 메뉴의 장치 목록을 길게 눌러, 설정을 입력하거나 공장 설정으로 재설정).


실시간 소비 전력



 홈페이지로 돌아가기 위해 누릅니다

 설정으로 들어가기 위해 누릅니다:
제품 이름 편집/ 펌웨어 버전을 확인/ 제품 정보를 확인/ 재부팅 기능을 전환

 소켓 재부팅 : 네트워크 연결 해제가 감지되면, 라우터에 연결되어있는 소켓이 자동으로 라우터를 다시 시작합니다.

 실시간 전력사용량 읽기, 최대 2400W까지 표시됩니다.

소비 전력 히스토리




1. kWh 또는 전기요금으로 표시되는 전력 소비 히스토리를 보여 줍니다.

 
2. 시, 일, 월로 표시되는 전력 소비 히스토리를 보여 줍니다.

3. 현재 전력 사용량을 확인하는 "최신" 탭을 누릅니다.


4. 장치가 오프라인인 경우에도 과거 통계를 확인합니다.

타이머



1. 타이머를 설정하는 슬라이드 입니다.
2. 30초/ 1분/ 5분/ 30분 단위의 "킥 버튼" 으로 타이머를 설정합니다.
3. 당신의 생각을 바꾸고 싶을 땐 시작 후에 타이머를 취소합니다.

스케줄 설정



1. 하나의 스마트 파워 플러그에 대하여 최대 12개의 스케줄을 설정합니다.
2. 스케줄은 장치가 인터넷에서 분리 또는 스마트 폰에 의해 제어되지 않는 경우에도, 장치에 저장됩니다. 일정은 아직 활성화 됩니다.



MyWatt